



Feature:



Certificates:



Feature:

Aluminum housing in black / customized color

Clear / milky / frosted / mirror PC cover

Cable come out from bottom / side




IP65

Standard DMX 512 control, max 44frames/second

1led/pix, 2led/pix, 3led/pixl, 6led/pix or customized


manual or auto address setting

Hot plug

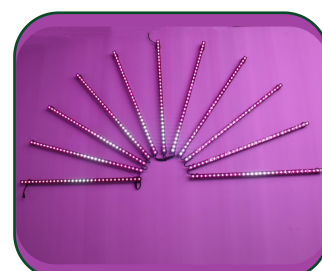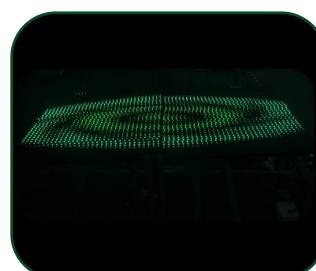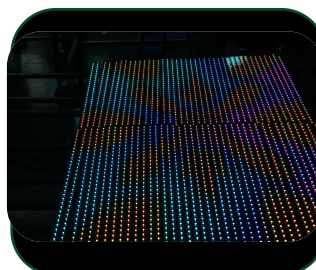

Product size and Parameters

2722type dmx led bar

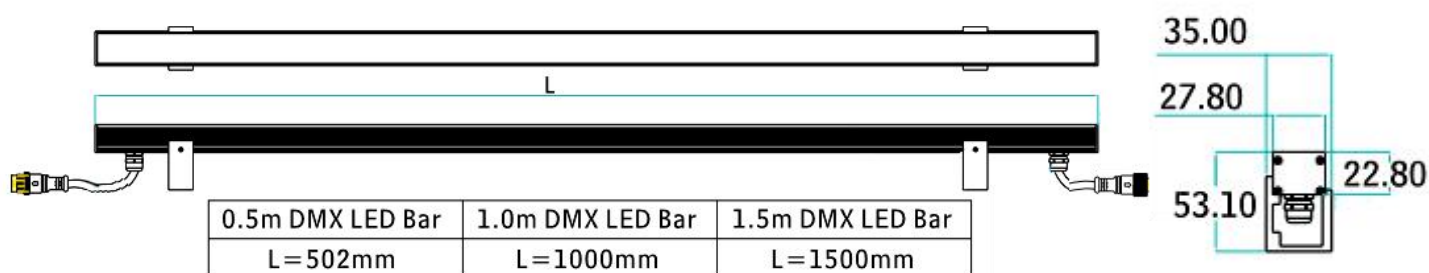

Unit: mm

PRODUCT SPECIFICATION

Model NO.	LED-LB2722DMX3216	LED-LB2722DMX1608	LED-LB2722DMX4816	LED-LB2722DMX2408
Dimension	1000x27.8x22.8mm	500x27.8x22.8mm	1000x27.8x22.8mm	500x27.8x22.8mm
LED type and QTY	32 pcs SMD RGB 5050	16 pcs SMD RGB 5050	48 pcs SMD RGB 5050	24 pcs SMD RGB 5050
Pixel QTY	16 PIX	8 PIX	16 PIX	8 PIX
Emitting angle	120 degree	120 degree	120 degree	120 degree
Color	RGB full color	RGB full color	RGB full color	RGB full color
Operating Voltage	DC 12V	DC 12V	DC 12V	DC 12V
Power	MAX=12W	MAX=6W	MAX=12W	MAX=6W
Control Protocol	DMX512			
Address Setting	Automatically / Manually			
Control Mode	DMX Artnet / DMX DVI / Standalone Control			
Material	Aluminum housing + PC cover			
Housing Color	Black or customized color			
Cover Color	Clear / milky / frosted / mirror cover			
Protection	IP65			
LED Source Life	50,000 hours, based on test data of LED manufacturer			
Temperature	-4°F to 122°F (-20°C to 50°C) operating temperature			
Humidity Range	0 to 95% non-condensing			

Remark: Specifications are subject to change without notice.

Product size and Parameters

2737 type dmx led bar




Unit: mm


PRODUCT SPECIFICATION

Model NO.	LED-LB2737DMX3216	LED-LB2737DMX1608	LED-LB2737DMX4816	LED-LB2737DMX2408
Dimension	1000x27x37mm	500x27x37mm	1000x27x37mm	500x27x37mm
LED type and QTY	32 pcs SMD RGB 5050	16 pcs SMD RGB 5050	48 pcs SMD RGB 5050	24 pcs SMD RGB 5050
Pixel QTY	16 PIX	8 PIX	16 PIX	8 PIX
Emitting angle	120 degree	120 degree	120 degree	120 degree
Color	RGB full color	RGB full color	RGB full color	RGB full color
Operating Voltage	DC 12V	DC 12V	DC 12V	DC 12V
Power	MAX=12W	MAX=6W	MAX=12W	MAX=6W
Control Protocol	DMX512			
Address Setting	Automatically / Manually			
Control Mode	DMX Artnet / DMX DVI / Standalone Control			
Material	Aluminum housing + PC cover			
Housing Color	Black or customized color			
Cover Color	Clear / milky / frosted / mirror cover			
Protection	IP65			
LED Source Life	50,000 hours, based on test data of LED manufacturer			
Temperature	-4°F to 122°F (-20°C to 50°C) operating temperature			
Humidity Range	0 to 95% non-condensing			


Remark: Specifications are subject to change without notice.

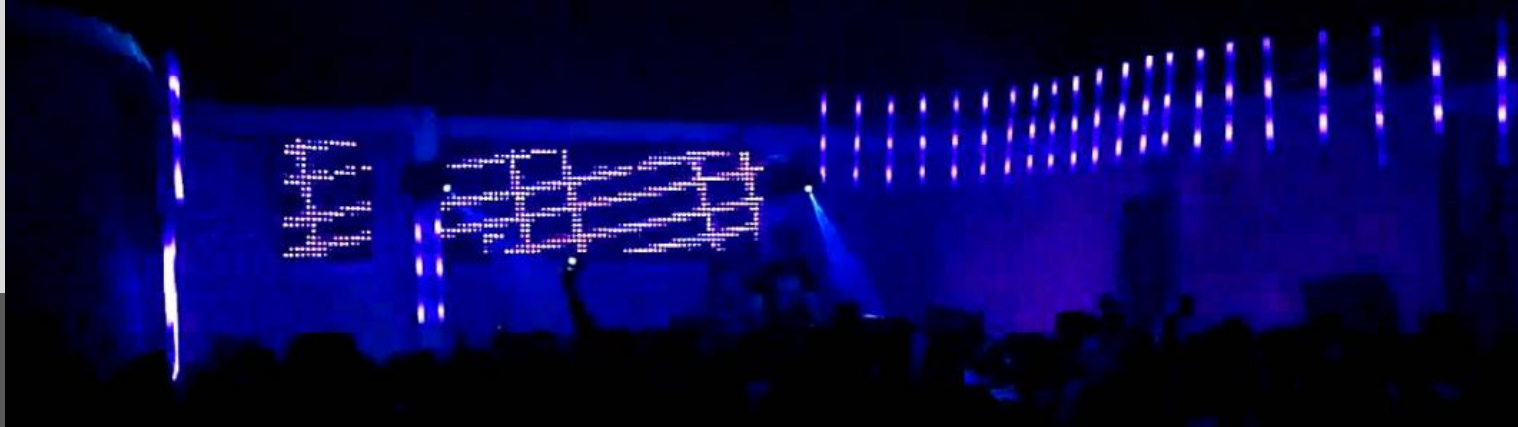

Wiring Diagram

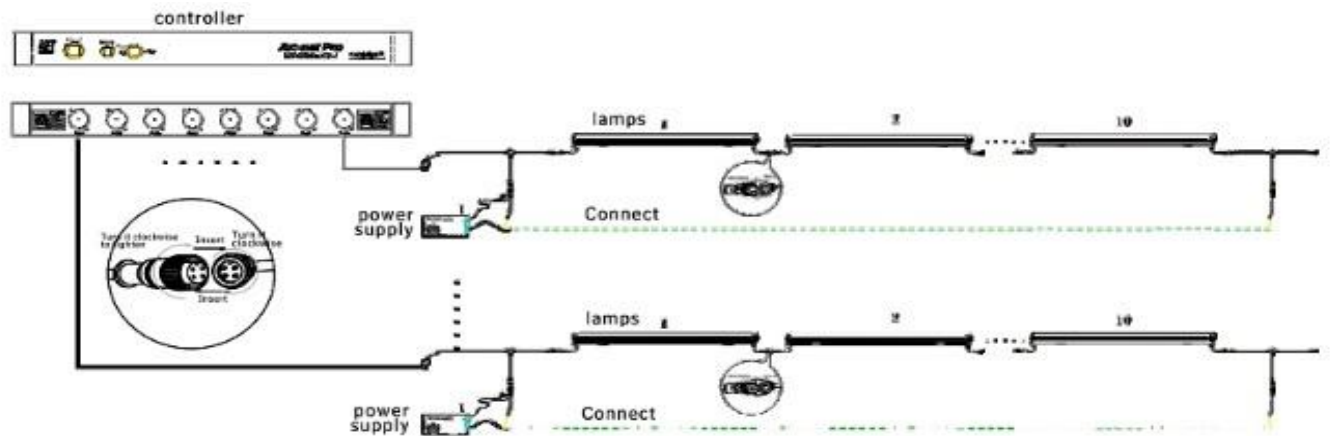


Accessories

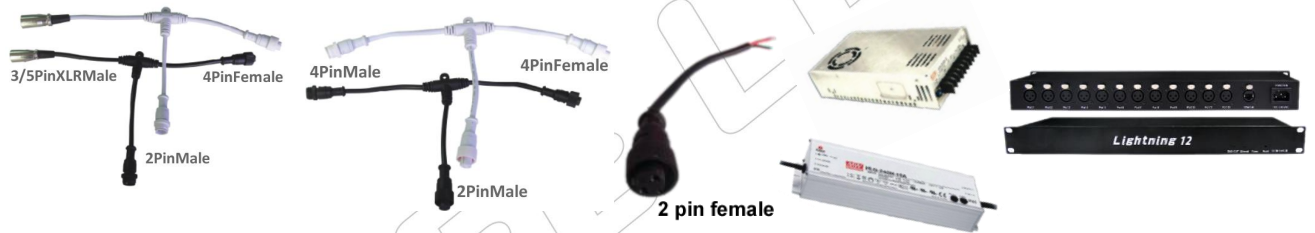

Model Definition

LED- LB 2722 DMX 32 16 - 02 02

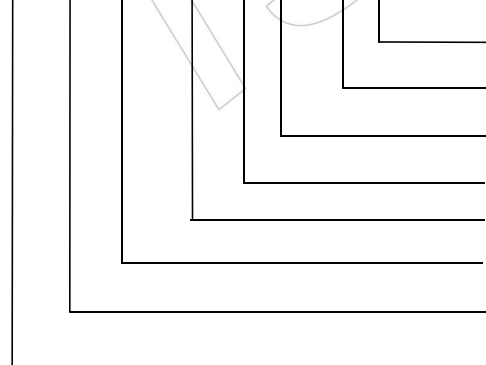

- 01=Cover Color, 01 in milky, 02 in clear, 03 in frosted, 04 in mirror
- 02=Housing Color, 01 in white, 02 in black, 03 in silver
- 16=Pixel Quantity
- 32=LED Quantity
- DMX=Control Protocol
- 2722=width & height (mm)
- LB=Linear Bar
- LED=ISEELED



Bld 12, Fuqiao Industrial Park, Fuyong,
Bao'an, Shenzhen, CN



International hotline:
86-755-3697 8198



E-mail: info@iseeled.com
Web: www.iseeled.com