

DMX Underground Light

Underground light for square, parking, hotel and so on

V2.1



Feature:



Certificates:



Feature:

Underground light adopt the dia-casting aluminum body and stainless steel cover

Wear-resistant, complete encapsulation, superior waterproof performance, IP68

RGB, Red, Green, Blue, White (2700-6500K), Amber color

Standard DMX 512 control, 44 frames/second

DMX address can be set manual or auto-addressing


With working life-span at least 50,000hrs

Fast get through input/output signal


Application: underground light can be used for square, parking, hotel and so on



Product size and Parameters

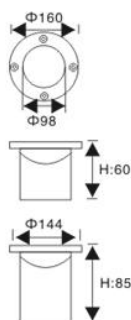

9W Underground Light

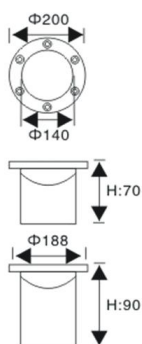

18W Underground Light

Unit: mm


PRODUCT SPECIFICATION

Model NO.	LED- UG80DMX0101	LED- UG160DMX0301	LED- UG200DMX0601	LED- UG250DMX0901
Material	Die-casting Aluminum , Stainless Steel	Die-casting Aluminum , Stainless Steel	Die-casting Aluminum , Stainless Steel	Die-casting Aluminum , Stainless Steel
Size	Ø80mm*H60mm	Ø160mm*H60mm	Ø200mm*H70mm	Ø250mm*H75mm
Power	3W	9W	18W	27W
LED QTY(unit: PC)	1pcs	3pcs	6pcs	9pcs
Working Voltage	DC 24V			
Color Range	RGB , red , green , blue , white			
Beam Angle	8° , 16° , 25° , 30° , 45° , 60°			
Address Setting	Automatically/Manually			
Protocol	DMX512			
Lifespan	50000 hours			
Protection	IP68			
Operating Temperature	-4°F to 122°F (-20°C to 50°C)			
Storage Temperature	-40°C ~ + 80°C			

Remark: Specifications are subject to change without notice.




Wiring Diagram

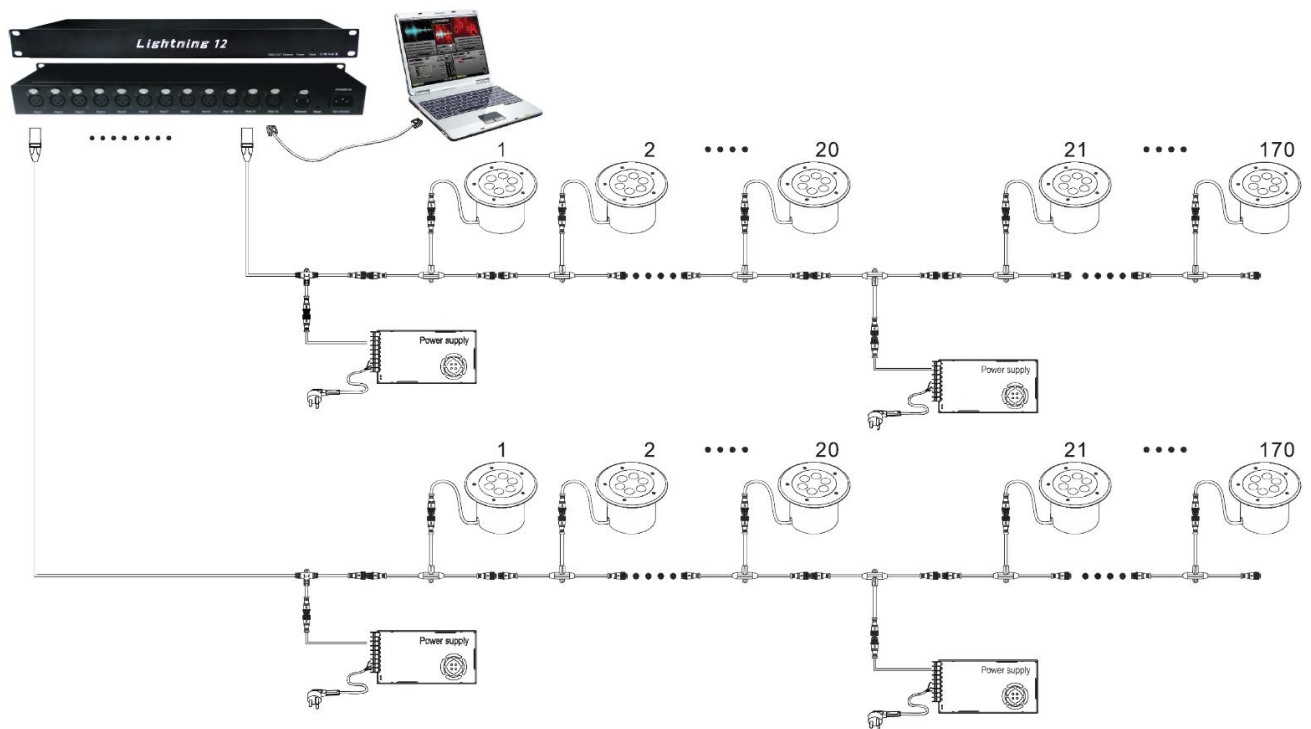

Accessories



Model Definition

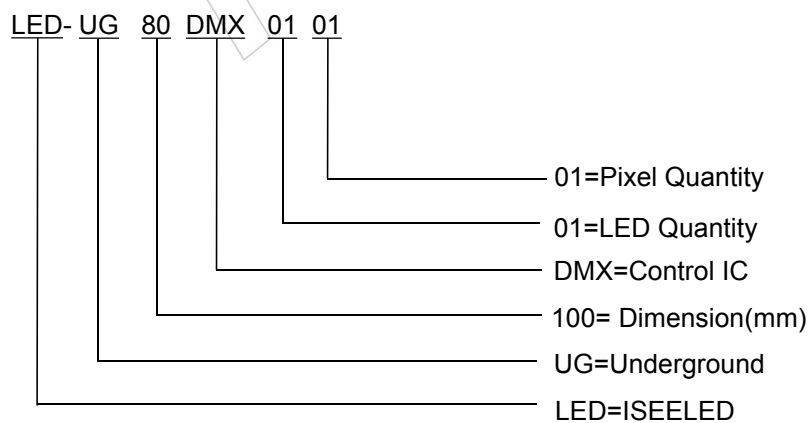

Remark: Specifications are subject to change without notice.



Bld 12, Fuqiao Industrial Park, Fuyong,
Bao'an, Shenzhen, CN



International hotline:
86-755-3697 8198



E-mail: info@iseeled.com
Web: www.iseeled.com