



Feature:



Certificates:



Feature: >>>

Dimension: Diameter 30mm, Diameter 50mm is available

Clear / Milky PC cover giving 360° viewing


Standard DMX 512 control, 44frames/second, manual or auto-addressing customized

3D pixel mapping to set on the software programming


Protections: short circuit, over current , over temperature

IP65 waterproof with good design of the housing


Application: 3D Vision figure, Interior design for clubs, museums, themed environments, Stage video elements for intimate or large concert productions, Television awards and game shows, Video Art projects




Product size and Parameters

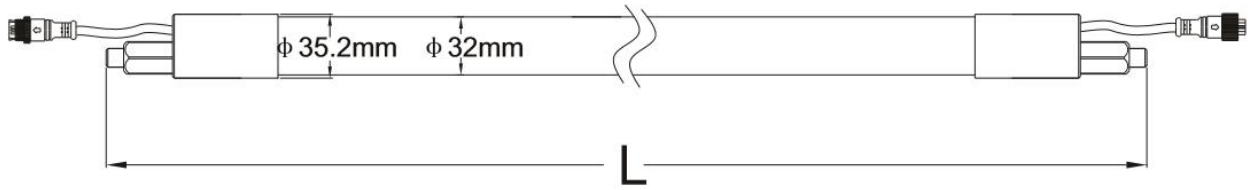

0.5m Magic Vertical Tube	1m Magic Vertical Tube	2m Magic Vertical Tube
L=680mm	L=1180mm	L=2180mm

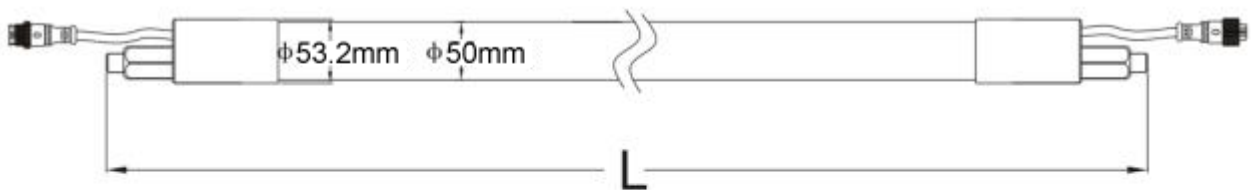

0.4m Magic 50 Tube	0.8m Magic 50 Tube	1.2m Magic 50 Tube
L=480mm	L=880mm	L=1280mm

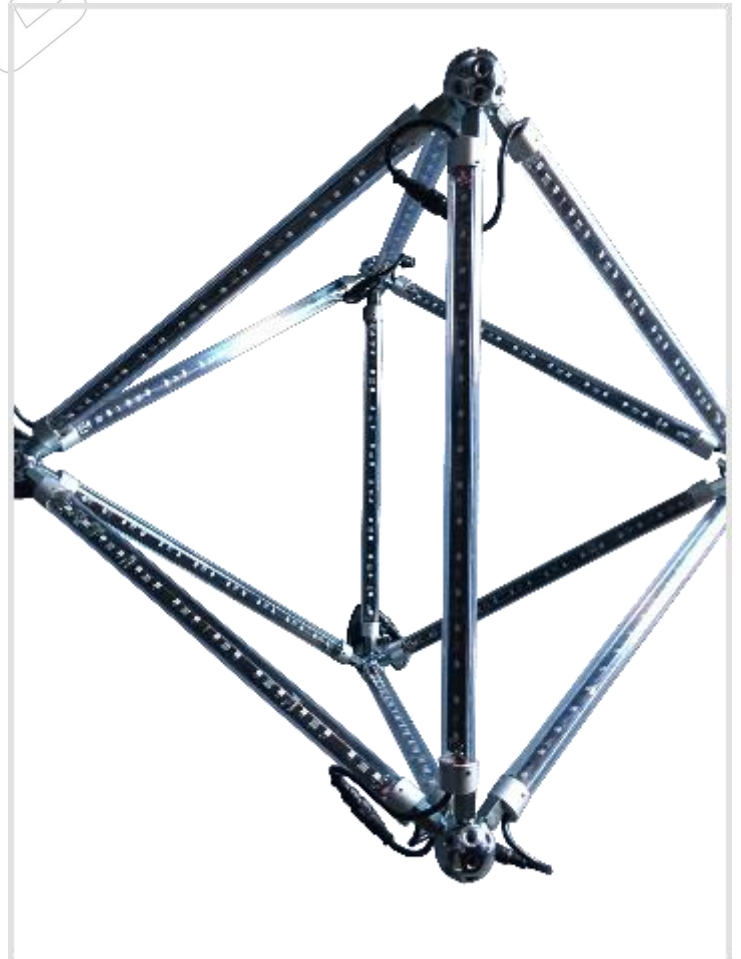


PRODUCT SPECIFICATION

Basic Information	Model NO.	LED-MT30DMX3208	LED-MT30DMX6416	LED-MT50DMX3208	LED-MT50DMX9624
	Diameter	30mm	30mm	50mm	50mm
	Length	680mm	1180mm	480mm	1280mm
	Color	RGB SMD RGB 5050	RGB SMD RGB 5050	RGB SMD RGB 5050	RGB SMD RGB 5050
	LED QTY	32LEDs	64LEDs	32LEDs	96LEDs
	Pixel QTY	8Pixels	16Pixels	8Pixels	24Pixels
	Tube Qty/Universe	20Tubes	10Tubes	21Tubes	7Tubes
Control and	Control Protocol	Standard DMX512			
	Address setting	Auto/Manual	Auto/Manual	Manual	Manual
	Operating Voltage	DC15V	DC15V	DC15V	DC15V
	Power	8W	15W	8W	21W
Others	LED Source Life	50,000 hours, based on test data of LED manufacturer			
	Housing	Clear housing		Milky housing	
	Temperature	-4°F to 122°F (-20°C to 50°C) operating temperature			
	Humidity Range	0 to 95% non-condensing			
	Protection	IP65	IP65	IP43	IP43
Weight	0.5kg/pcs	1kg/pcs	0.5kg/pcs	1kg/pcs	

Remark: Specifications are subject to change without notice.

Wiring Diagram

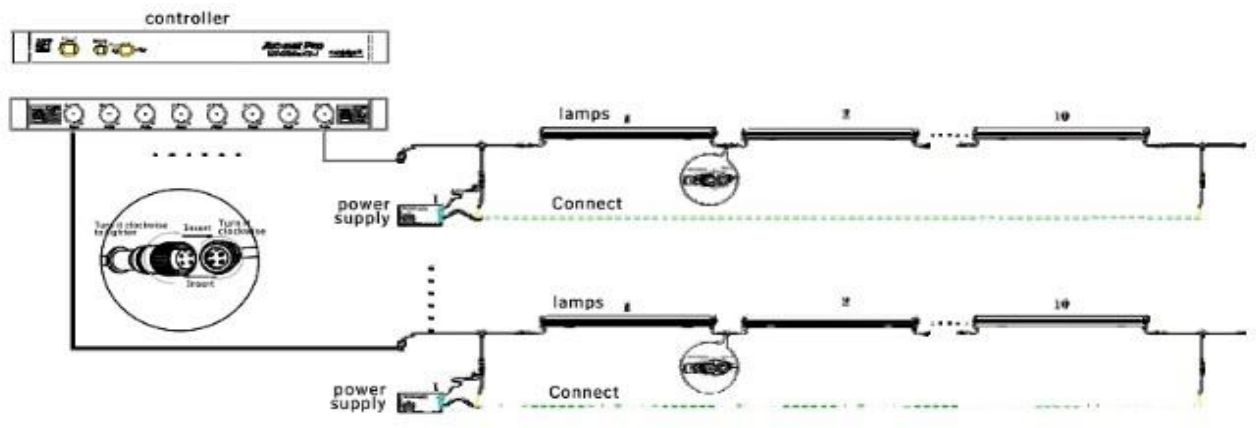

Accessories



Model Definition

